Vector Frame Kit 04

VF-K-04

Stand apart from the competition with a state-of-the-art, modern Vector Frame Kit. The Vector Framel Kit series is a collection of extrusion-based, dye-sublimated fabric mural graphic displays. Vector Frame Kits are easy to assemble and dismantle.

features and benefits:

- Heavy-duty 50mm silver extrusion frame
- Single-sided SEG dye-sublimated fabric graphics
- Easy step-by-step instructions

- Kit includes frame, five fabric graphics, four 120 watt floodlights, two wheeled molded cases, and one enclosed fabric graphic counter
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware	Graphic
Assembled unit: 113.25"w x 94.5"h x 22"d approx. 2900mm(w) x 2400mm(h) x 560mm(d)	**Panels A, B, D, E:** Total visible area: 17.72"w x 94.5"h 450mm(w) x 2400mm(h)
Counter: 39.375"w x 36.625"h x 22.25"d approx. 1000mm(w) x 930mm(h) x 570mm(d)	**Panel C:** Total visible area: 70.866"w x 94.5"h 1800mm(w) x 2400mm(h)
Shipping	**Counter panels A, C:** Total visible area: 17.72"w x 35.43"h 450mm(w) x 900mm(h)
Shipping dimensions - ships in 2 cases Each OCH2 case: 52"l x 30"w x 15"h 1320mm(l) x 760mm(w) x 380mm(h)	**Counter panels B, D:** Total visible area: 35.43"w x 35.43"h 900mm(w) x 900mm(h)
Approximate shipping weight (entire kit): 200 lbs/90.7 kg	Refer to related graphic templates for more information

additional information:

Graphic material: Dye sublimated fabric

Tabletop color options:

silver   black   mahogany   natural

Counter holds max weight 100 lbs/45.4 kg

Lights included: Lumina 200 120 watt floodlight, curved arm, black finish, 19.5" from end to end

Parts included

Part Label	Qty	Part code
F2	x2	PH-1155-S-L1
F6	x8	PHFC2-1200-2L
F7	x4	PHFC2-1200-2
F8	x8	PHFC2-1200-2L
F13	x2	PHFC2-900-2
F15	x2	PHFC2-900-2
F17	x8	PHFC2-450-1
VE-39	x8	PM2S-1200-A-A
VE-45	x4	PH4-300
Panel A	x1	-
Panel B	x1	-
Panel C	x1	-
Panel D	x1	-
Panel E	x1	-
Corner lock	x20	CB9
Lock connector	x13	IB2
Light	x4	-
Tool kit	x1	V-TK-01
Steamer	x1	FABRIC-STEAMER
Step stool	x1	STEPSTOOL

10'-0"
[3048mm]

10'-0"
[3048mm]
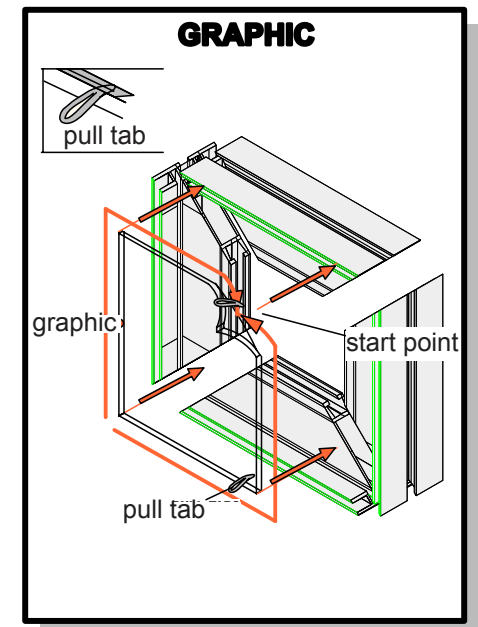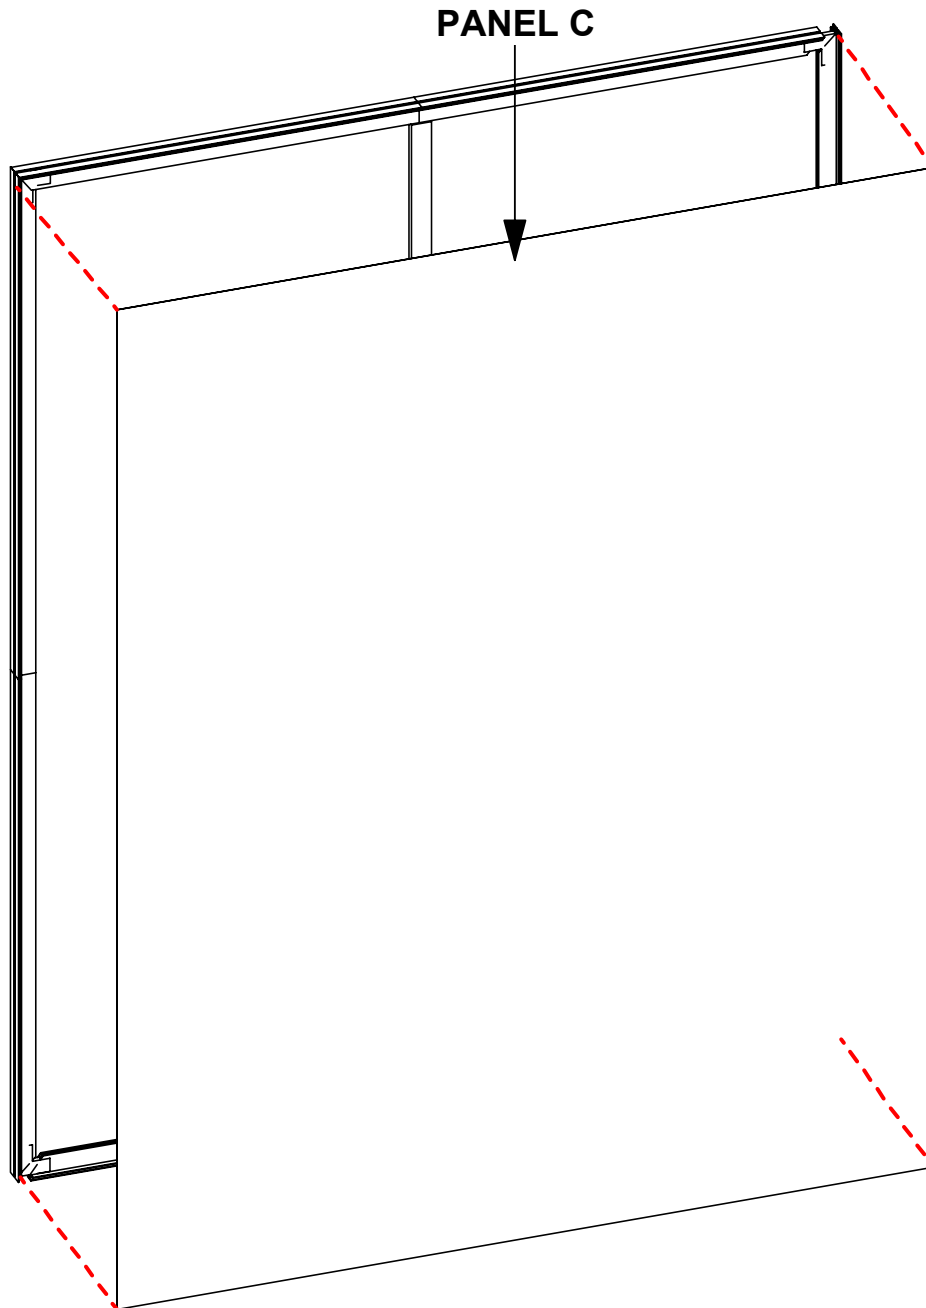
SECTION A

SECTION B

SECTION C
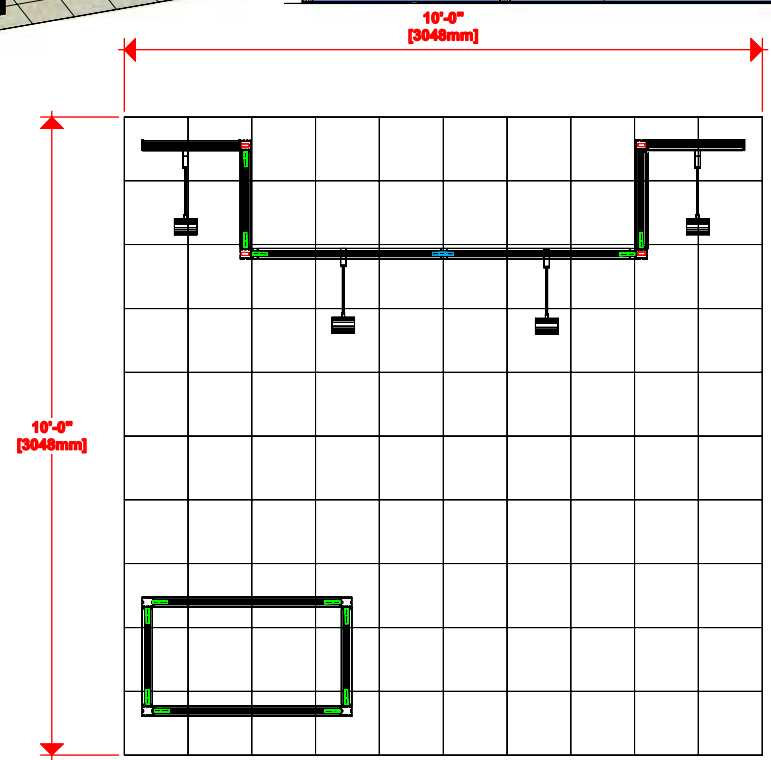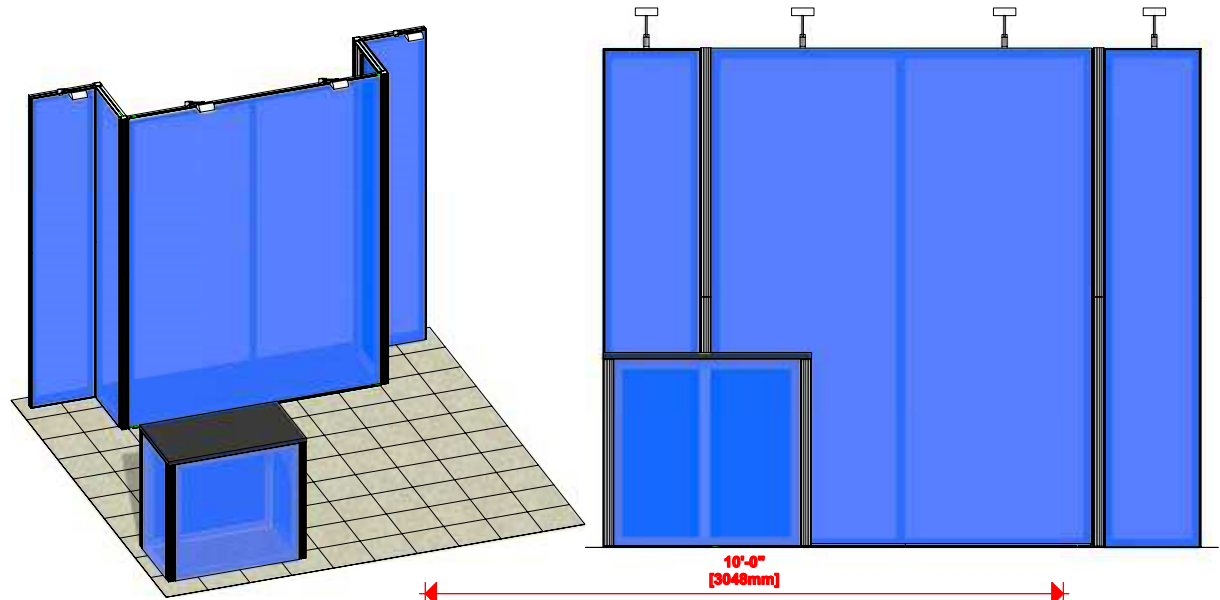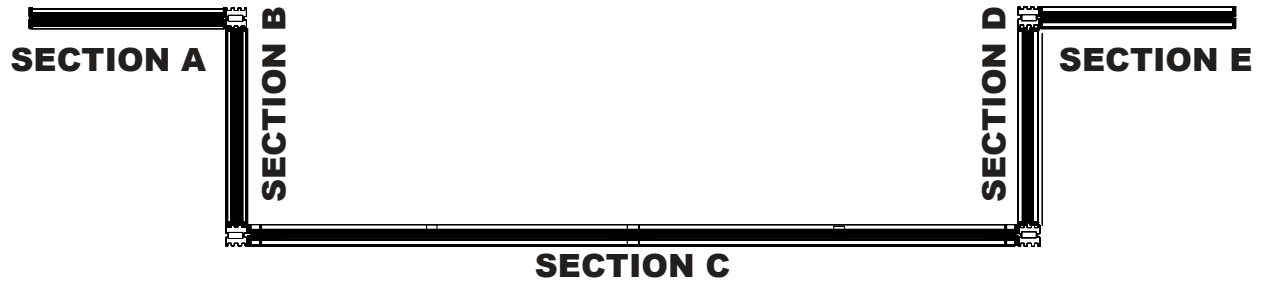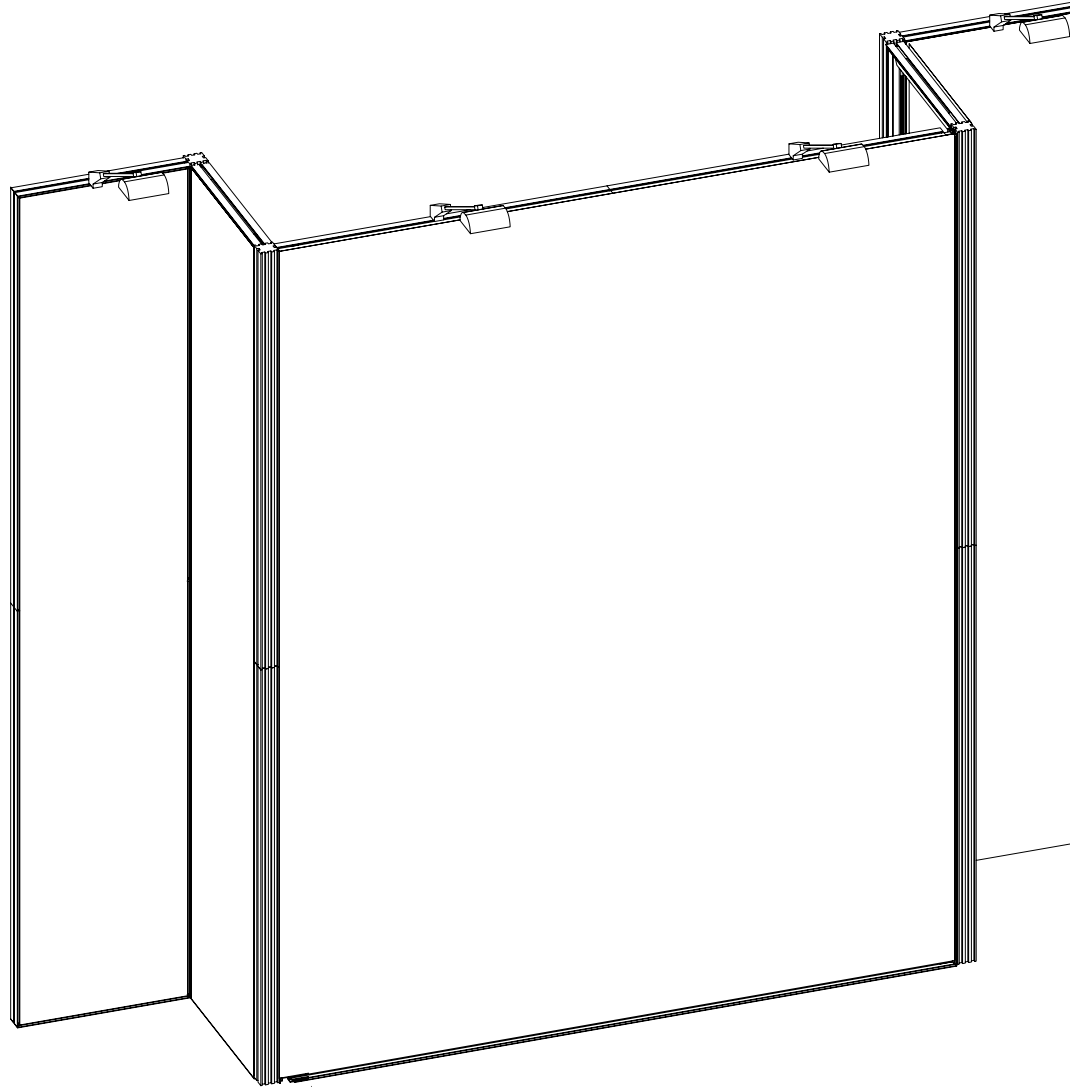
SECTION D

SECTION E

Step 1. Assemble Section C

Arrange pieces on the floor as shown in the diagram below. Connect the F8s and F6s with lock connectors to create uprights. Connect the F2s with a lock connector. Connect the F16s and F13s with lock connectors to create horizontals. Insert a corner lock into both ends of the horizontals. Attach center upright to horizontals. Slide the corner locks in the horizontals into the remaining two uprights. When locking be sure to turn each cam a little bit and then go back and tighten both to the proper tension. Take care to turn locks only half a turn. All locks face back.
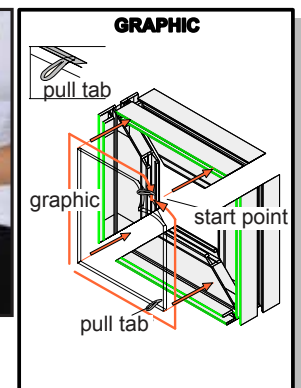
F13

LOCK CONNECTOR

CORNER LOCK

F15

CORNER LOCK

F6

F2

F6

F8

LOCK CONNECTOR

LOCK CONNECTOR

LOCK CONNECTOR

F8

F2

F15

F8

F13

CORNER LOCK

CORNER LOCK

LOCK CONNECTOR

FRAMES

assemble frames on floor

LOCK CONNECTOR

extrusion

lock connector

t-handle

extrusion

CORNER LOCK

extrusion

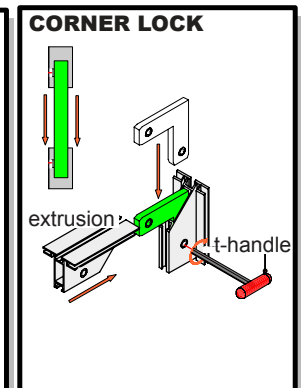t-handle

SECTION C
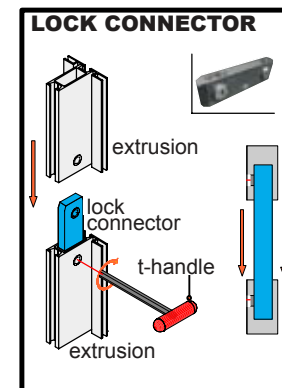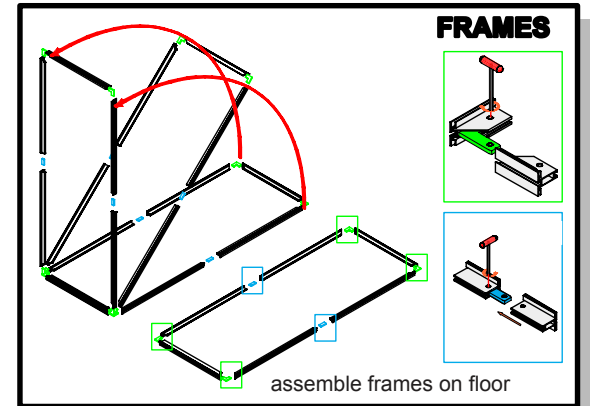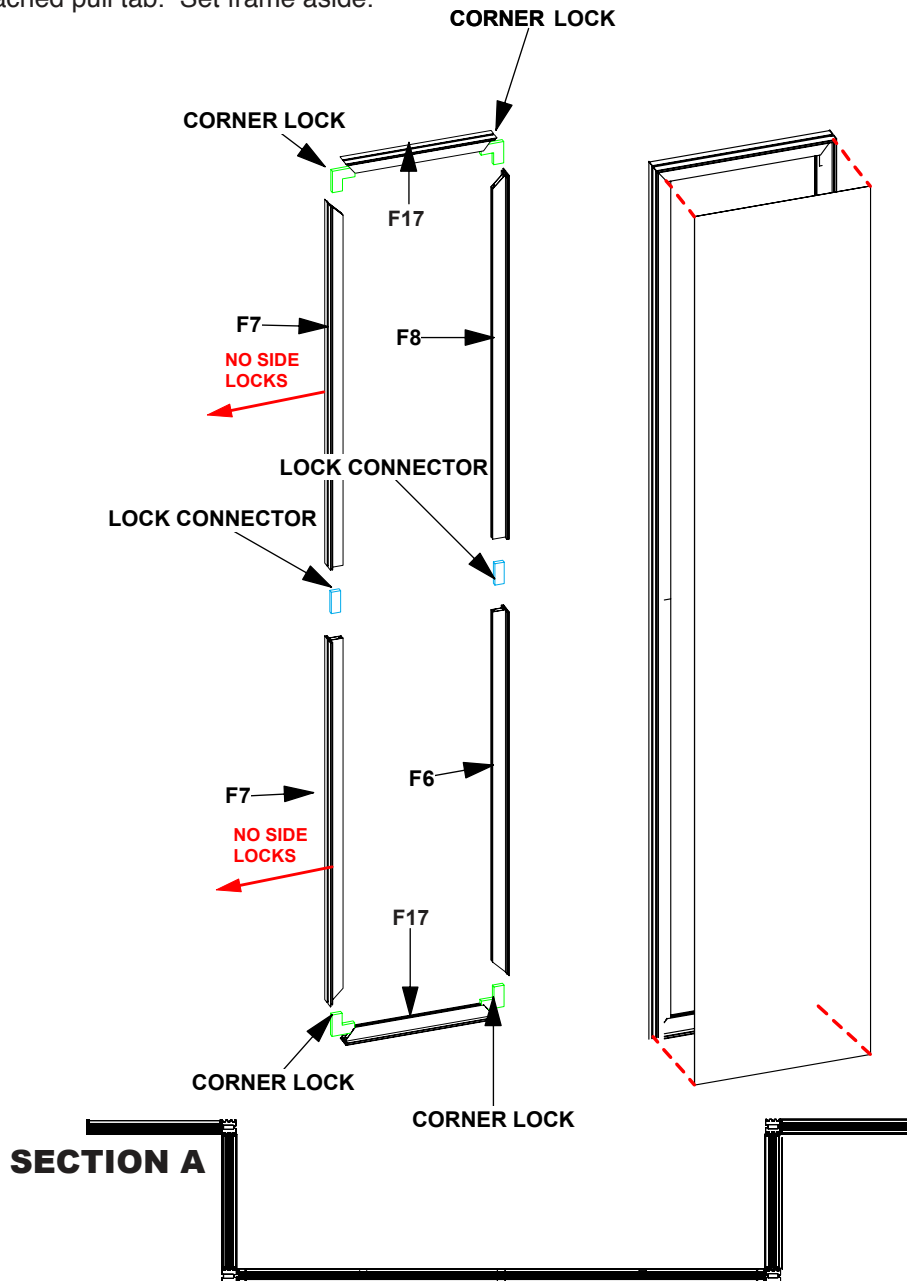
3.
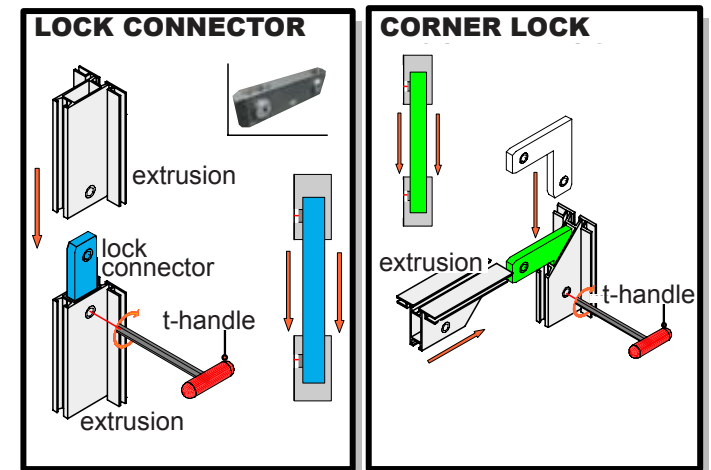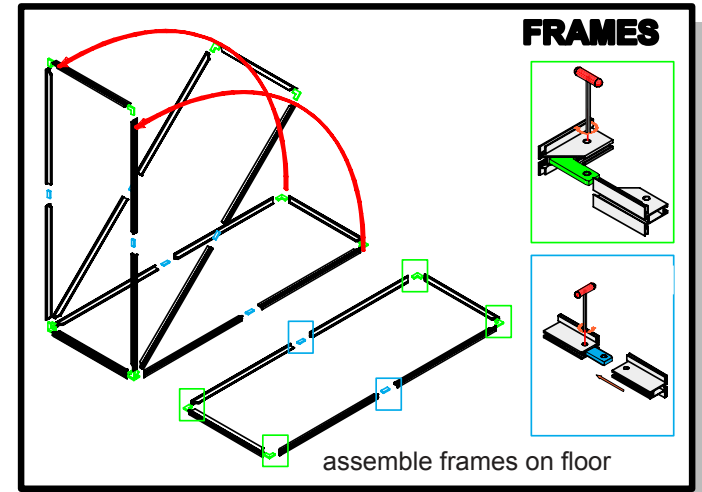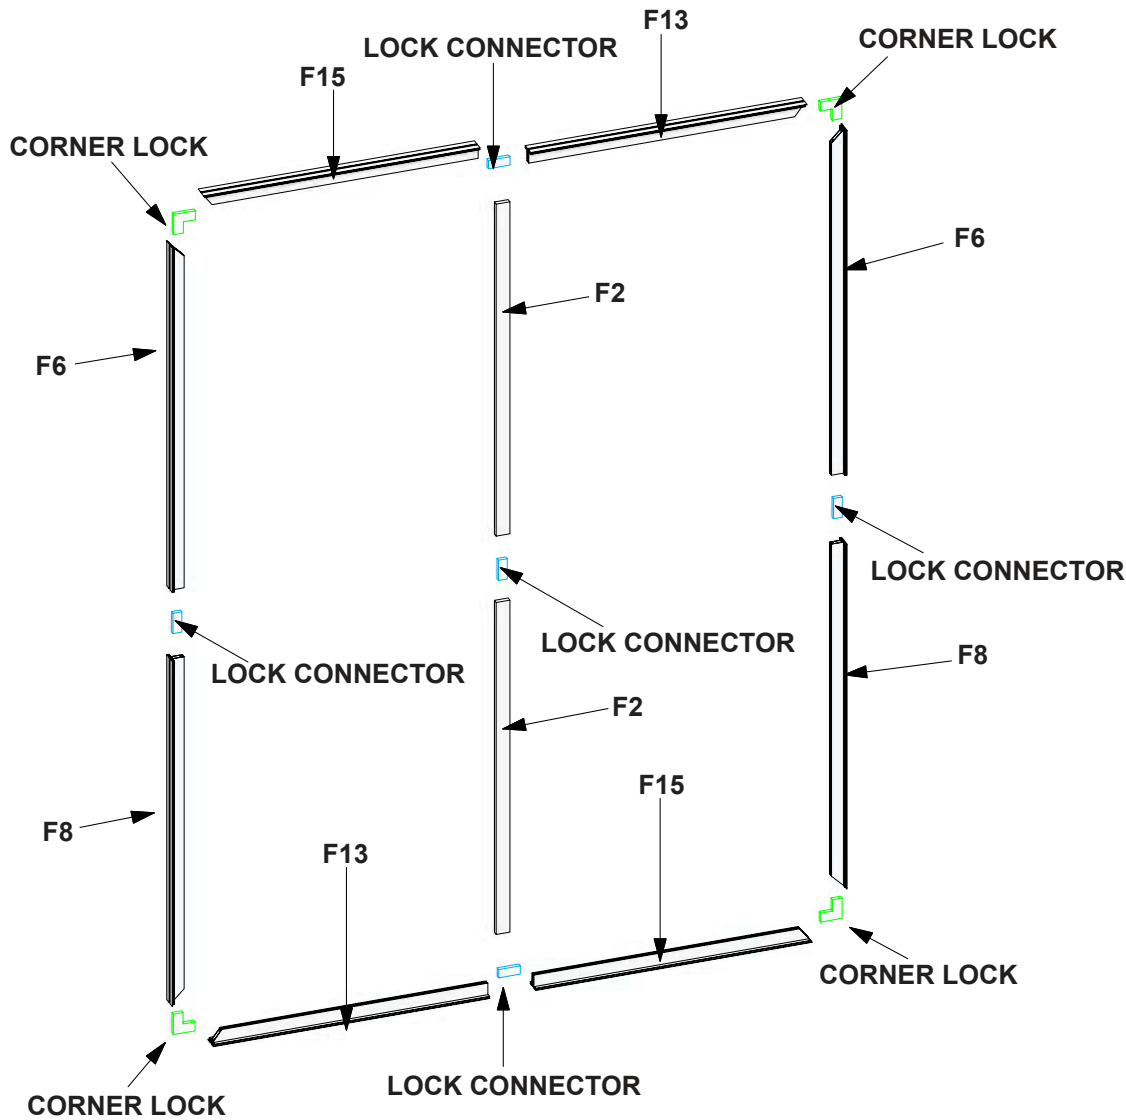
Step 2. Put Graphic on Section C

Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frame aside.

PANEL C

GRAPHIC

pull tab

graphic

start point

pull tab

SECTION C

4.

Step 3. Assemble Section A

Arrange pieces on the floor as shown in the diagram below. Connect the F8 and F6 with a lock connector. Connect the F7s with a lock connector Insert a corner lock into place on either end of the F17s. Slide F17s into the uprights and assure all locks are tightened. All locks face back. Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frame aside.

CORNER LOCK

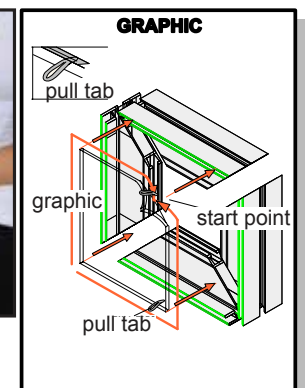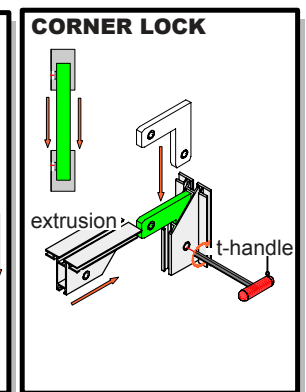CORNER LOCK

F17

F7

F8

NO SIDE LOCKS

LOCK CONNECTOR

LOCK CONNECTOR

F7

F6

NO SIDE LOCKS

F17

CORNER LOCK

CORNER LOCK

SECTION A

FRAMES

assemble frames on floor

LOCK CONNECTOR

extrusion

lock connector

t-handle

extrusion

CORNER LOCK

extrusion

t-handle
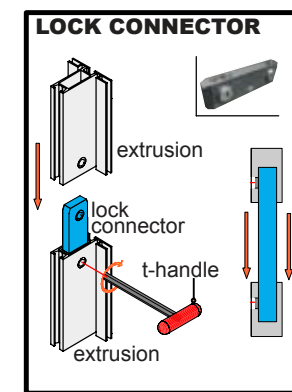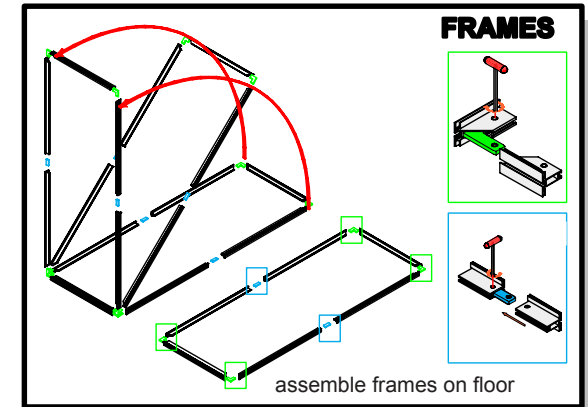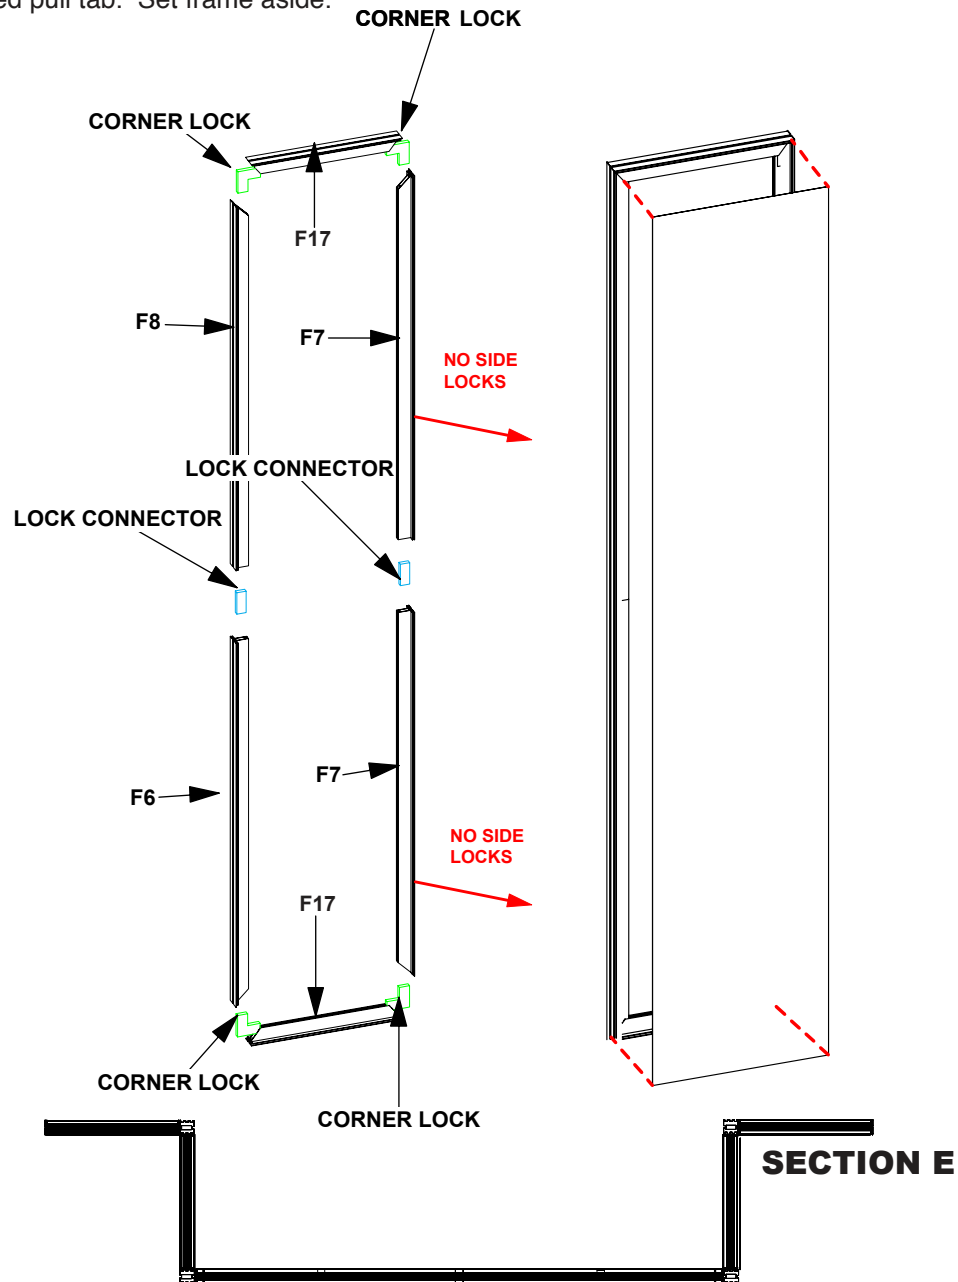
GRAPHIC

pull tab

graphic

start point

pull tab

5.

Step 4. Assemble Section E

Arrange pieces on the floor as shown in the diagram below. Connect the F8 and F6 with a lock connector. Connect the F7s with a lock connector Insert a corner lock into place on either end of the F17s. Slide F17s into the uprights and assure all locks are tightened. All locks face back. Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frame aside.
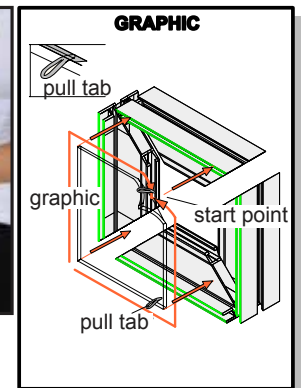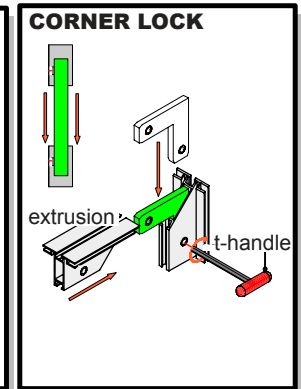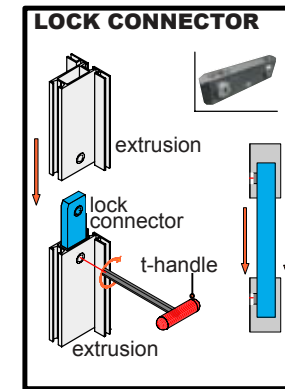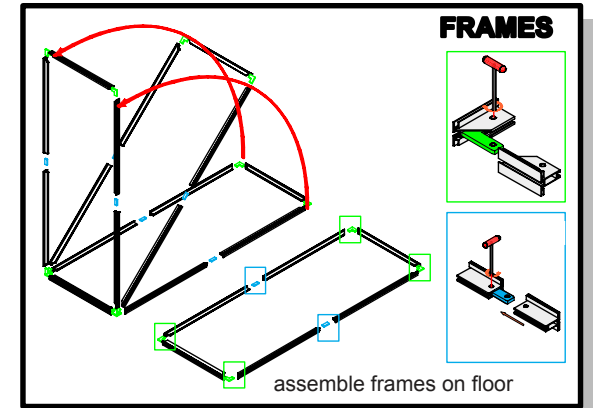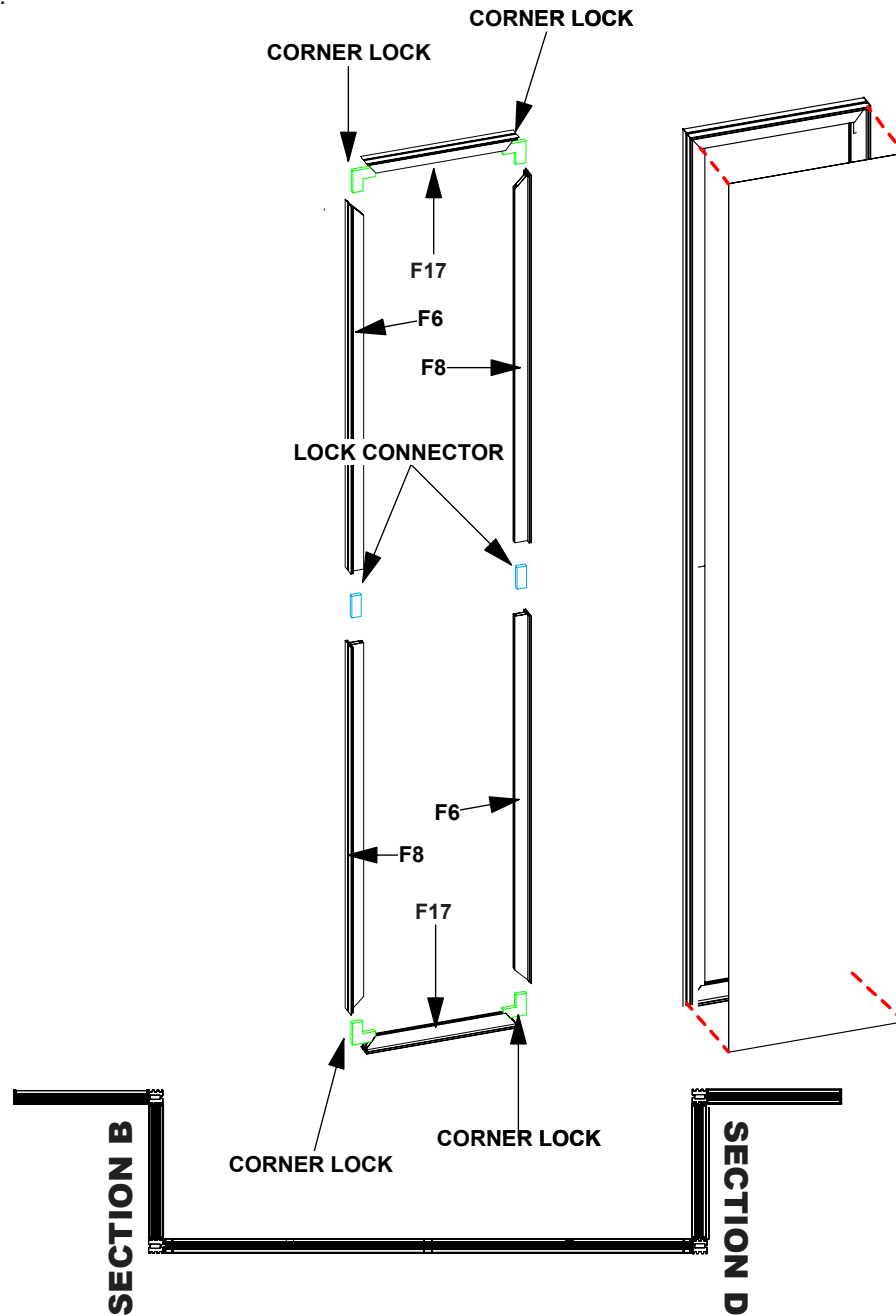
CORNER LOCK

CORNER LOCK

F17

F8

F7

NO SIDE LOCKS

LOCK CONNECTOR

LOCK CONNECTOR

F7

F6

NO SIDE LOCKS

F17

CORNER LOCK

CORNER LOCK

SECTION E

FRAMES

assemble frames on floor

LOCK CONNECTOR

extrusion

lock connector

t-handle

extrusion

CORNER LOCK

extrusion

t-handle

GRAPHIC

pull tab

graphic

start point

pull tab
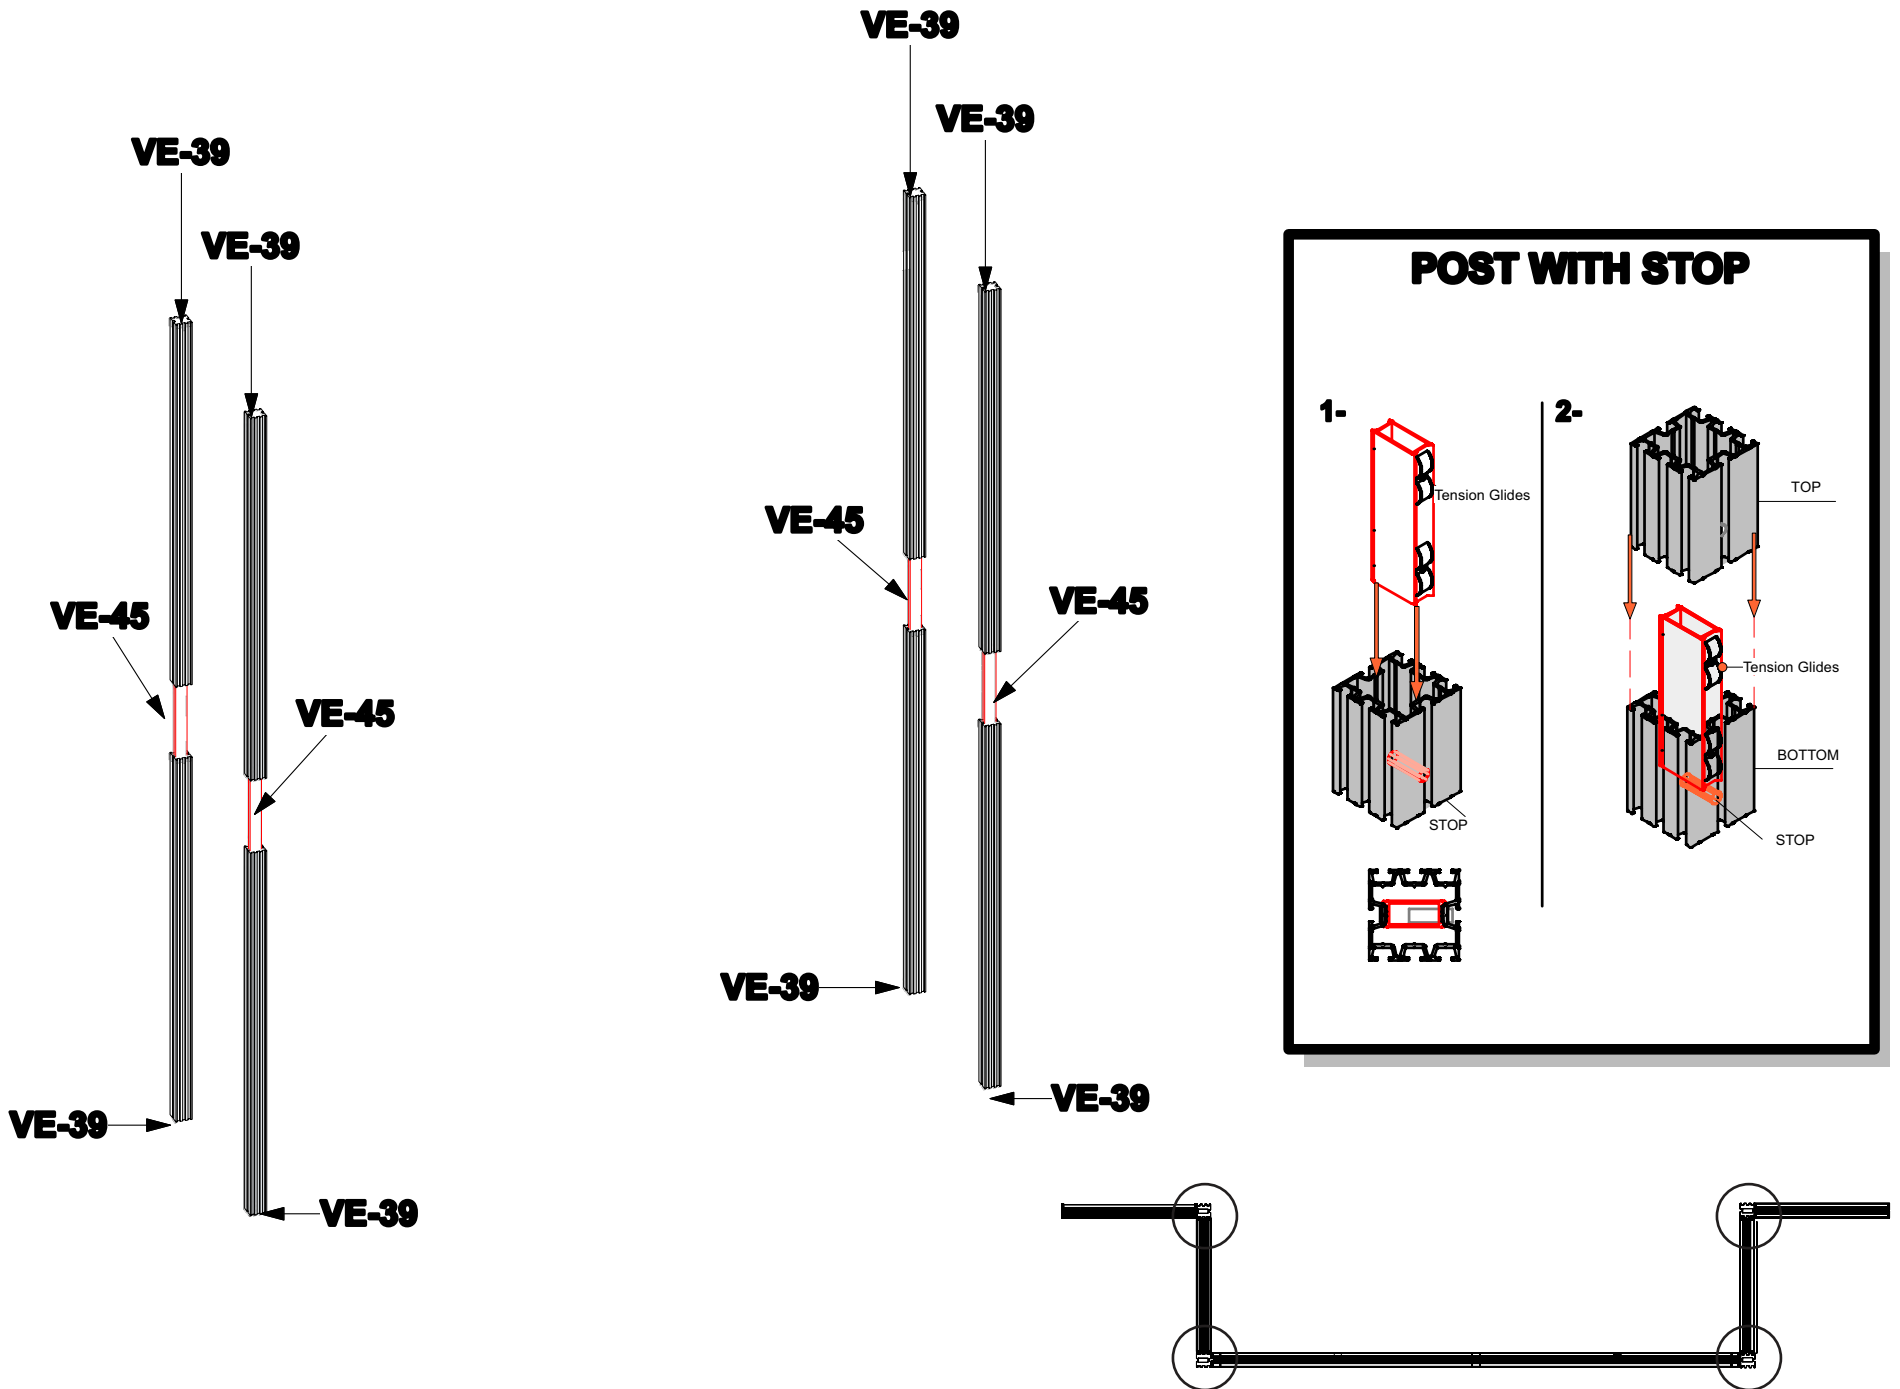
6.

Step 5. Assemble Sections B & D

Arrange pieces on the floor as shown in the diagram below. Connect the F8s and F6s with a lock connector. Insert a corner lock into place on either end of the F17s. Slide F17s into the uprights and assure all locks are tightened. All locks face back. Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frame aside.

CORNER LOCK

CORNER LOCK

F17

F6

F8

LOCK CONNECTOR

F6

F8

F17

CORNER LOCK

CORNER LOCK

SECTION B

SECTION D

FRAMES

assemble frames on floor

LOCK CONNECTOR

extrusion

lock connector

t-handle

extrusion

CORNER LOCK

extrusion

t-handle

GRAPHIC

pull tab
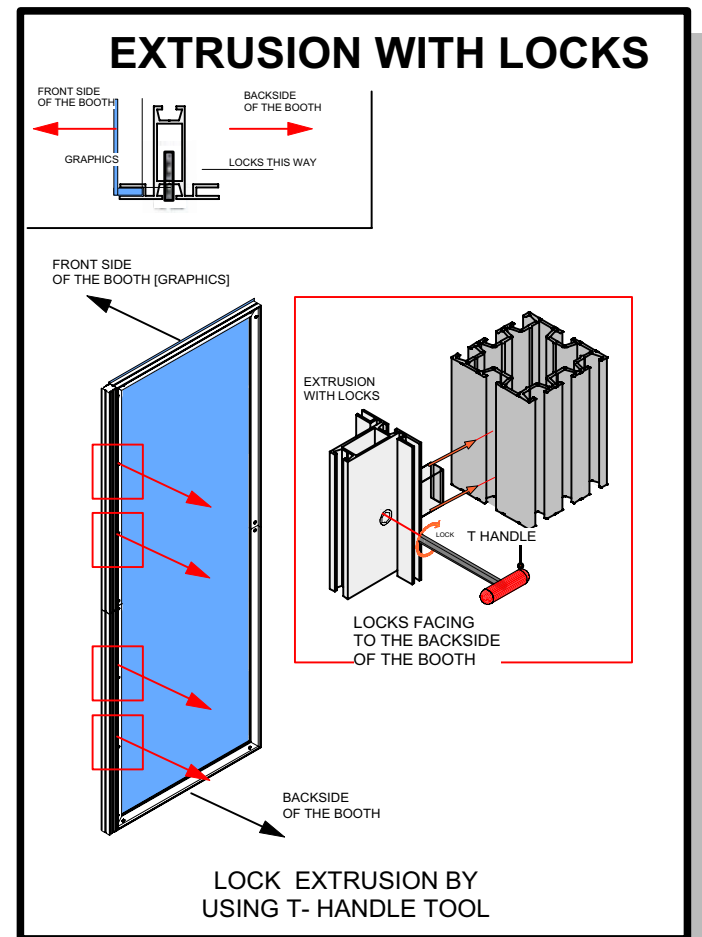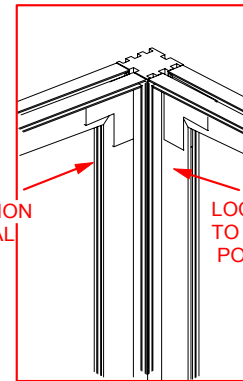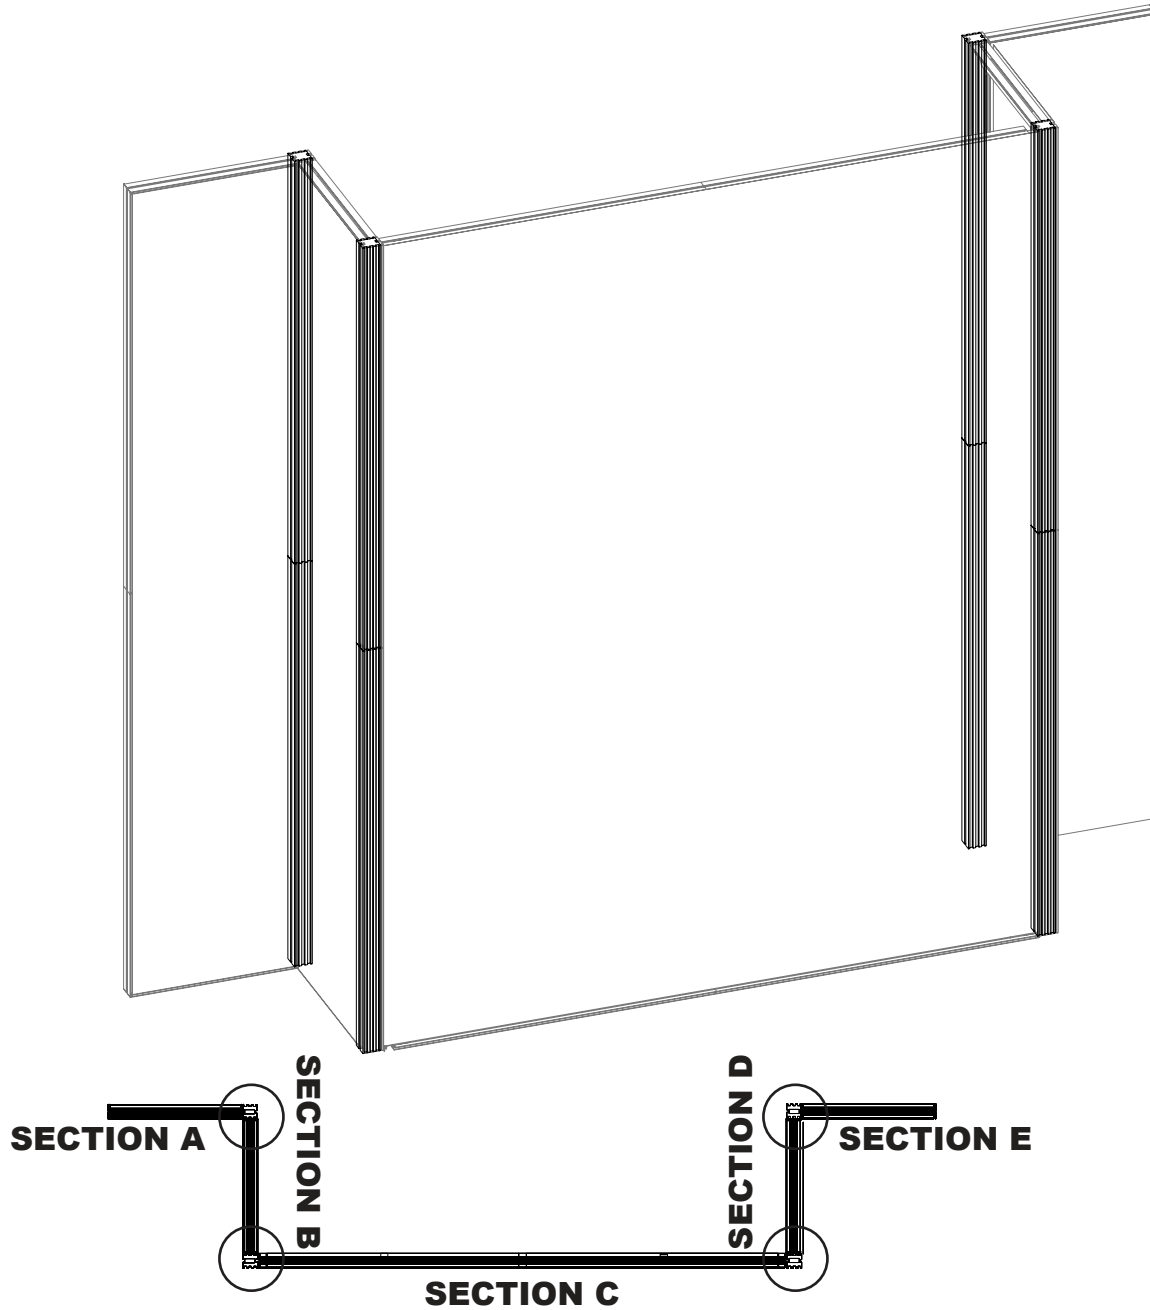
graphic

start point

pull tab

7.

Step 6.

Slide the VE-45 into the lower VE-39s as shown in detail below. Slide upper VE-39s over VE-45s to create uprights.

VE-39

VE-39

VE-39

VE-39

VE-45

VE-45

VE-45

VE-45

VE-39

VE-39

VE-39

VE-39

POST WITH STOP

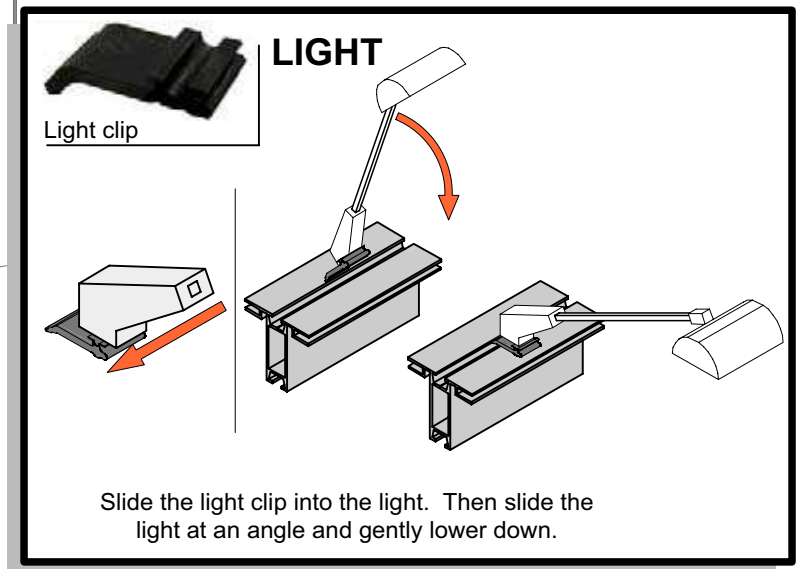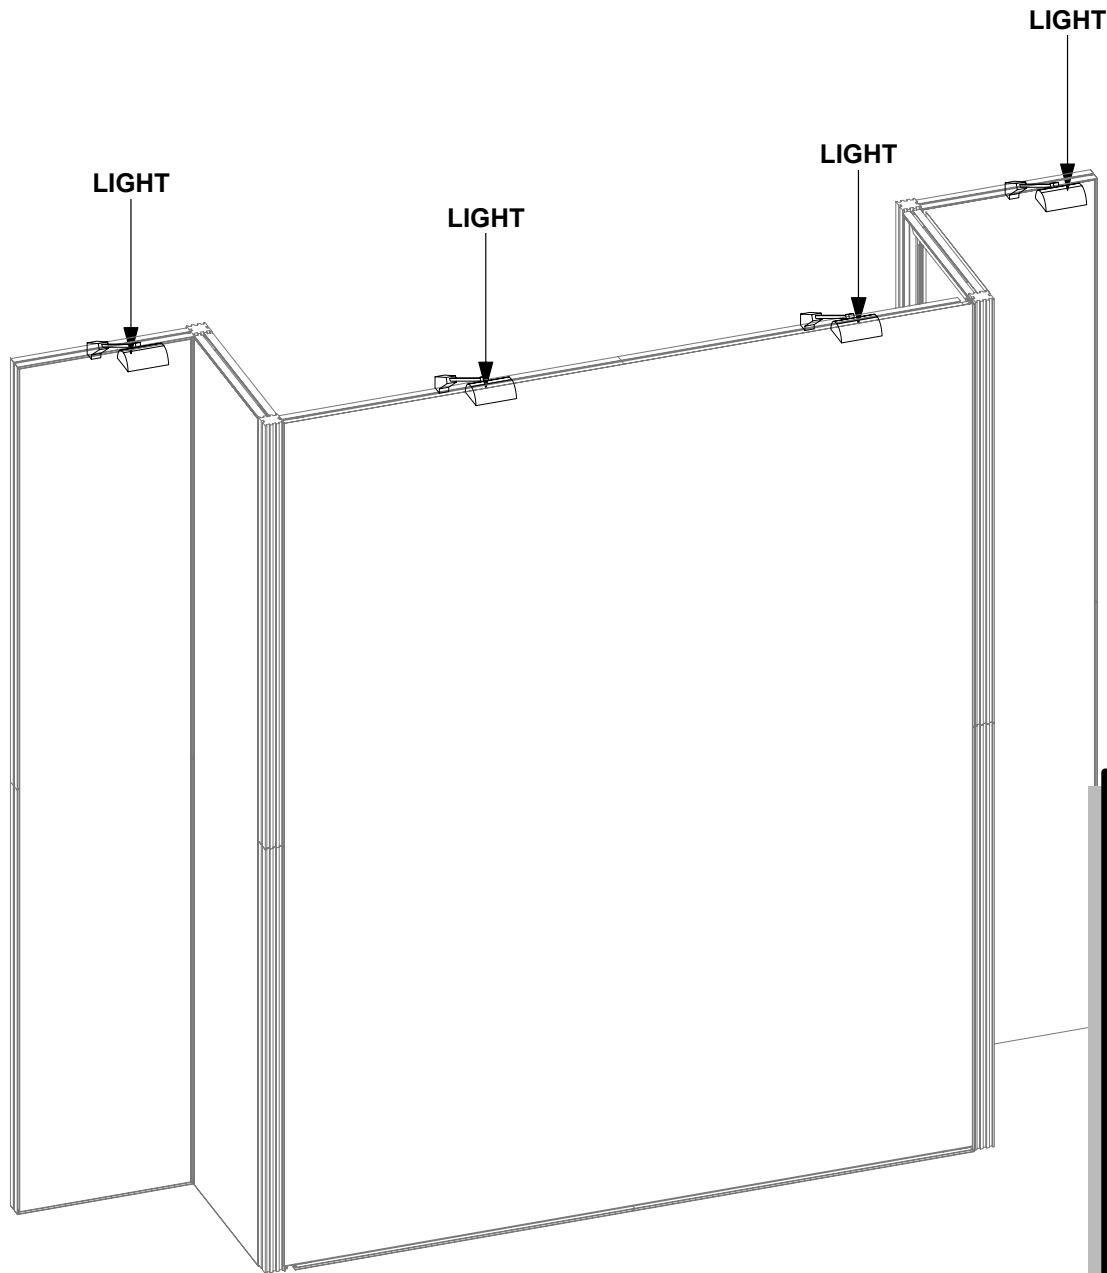1-
Tension Glides

STOP

2-
TOP

Tension Glides

BOTTOM

STOP

Step 7.
Lock completed uprights to the frame where shown using detail below.

LOCK SECTION TO VERTICAL POST

LOCK SECTION TO VERTICAL POST

SECTION A

SECTION B

SECTION C

SECTION D

SECTION E

EXTRUSION WITH LOCKS

FRONT SIDE OF THE BOOTH

BACKSIDE OF THE BOOTH

GRAPHICS

LOCKS THIS WAY

FRONT SIDE OF THE BOOTH [GRAPHICS]

EXTRUSION WITH LOCKS

LOCK

T HANDLE

LOCKS FACING TO THE BACKSIDE OF THE BOOTH

BACKSIDE OF THE BOOTH

LOCK EXTRUSION BY USING T- HANDLE TOOL

Step 8.
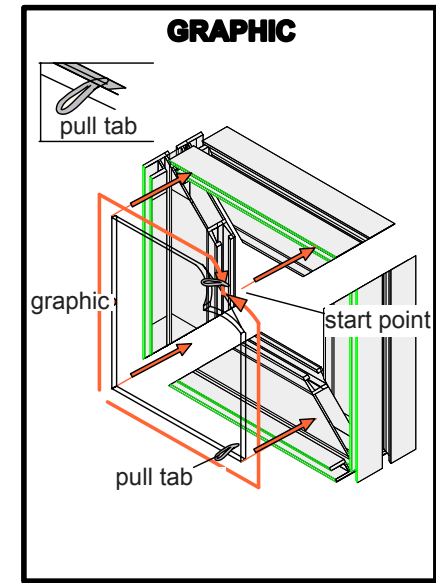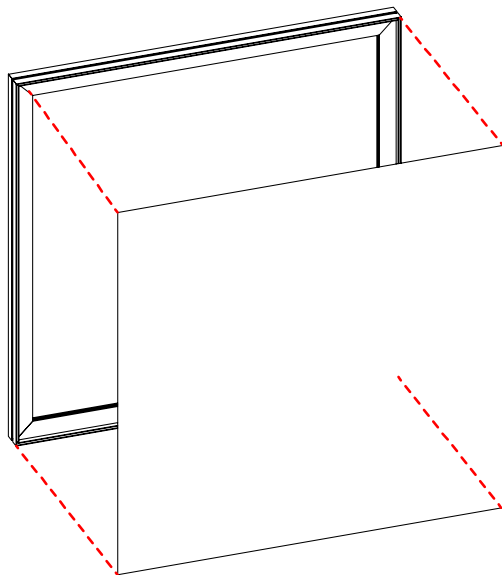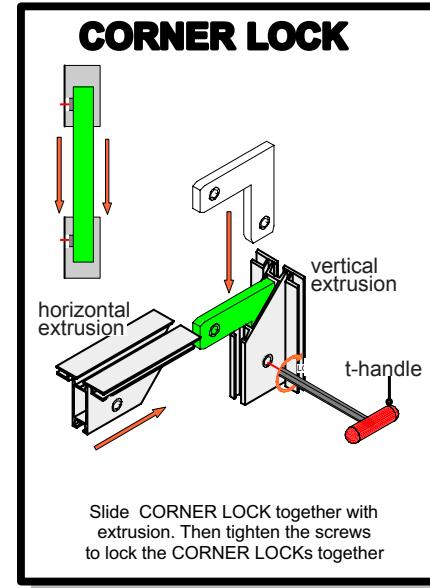Attach lights to included clips by sliding onto ridges. Set clip in channel on top of frame as shown in detail below.
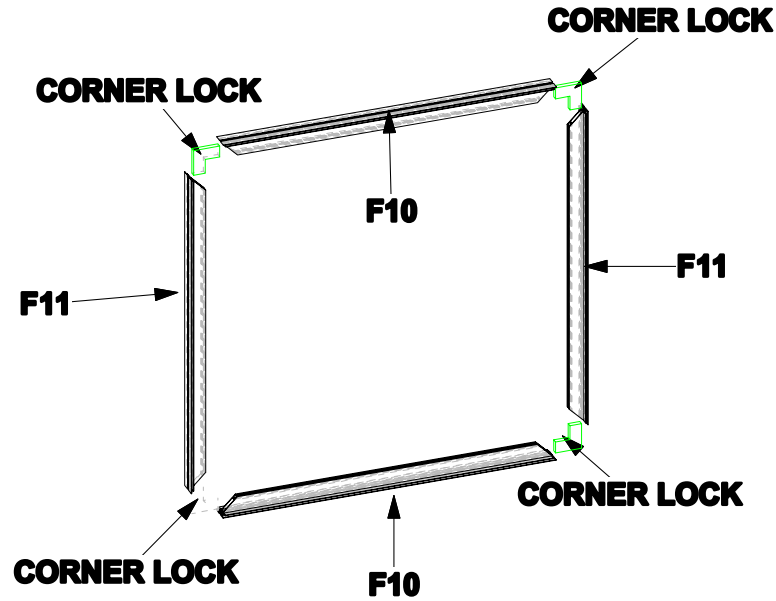
LIGHT

LIGHT

LIGHT

LIGHT

LIGHT

Light

Light clip

LIGHT

Slide the light clip into the light. Then slide the
light at an angle and gently lower down.

10.

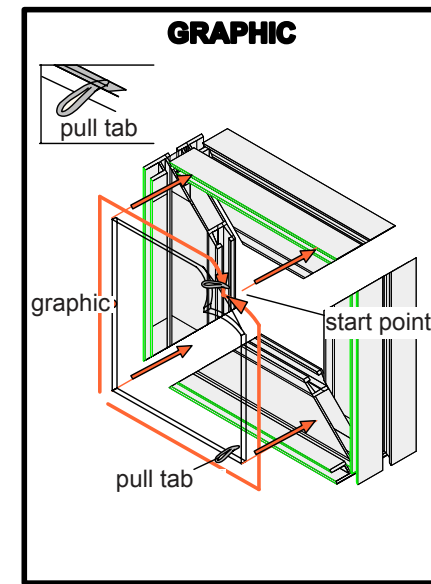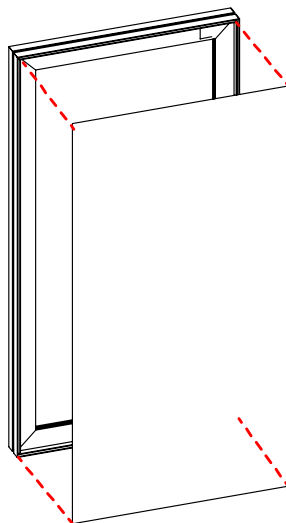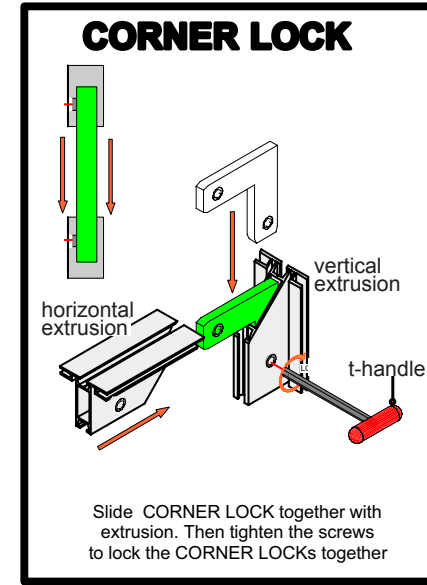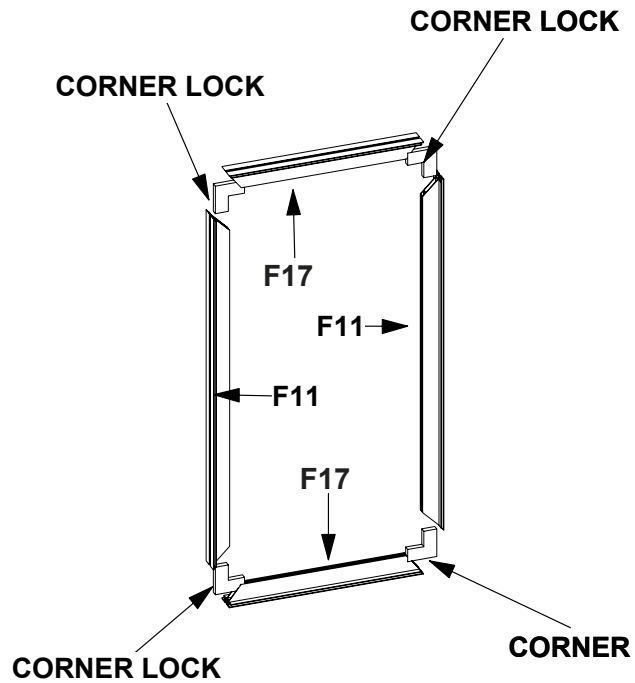| Parts included		
Part Label	**Qty**	**Part code**
F10	x4	PHFC2-900-1
F11	x8	PHFC2-900-1L
Corner lock	x16	CB9
F17	x4	PHRC2-450-1
VE-66	x4	PM2S-900
Countertop	x1	SW-CT-01
Panel A	x1	-
Panel B	x1	-
Panel C	x1	-
Panel D	x1	-
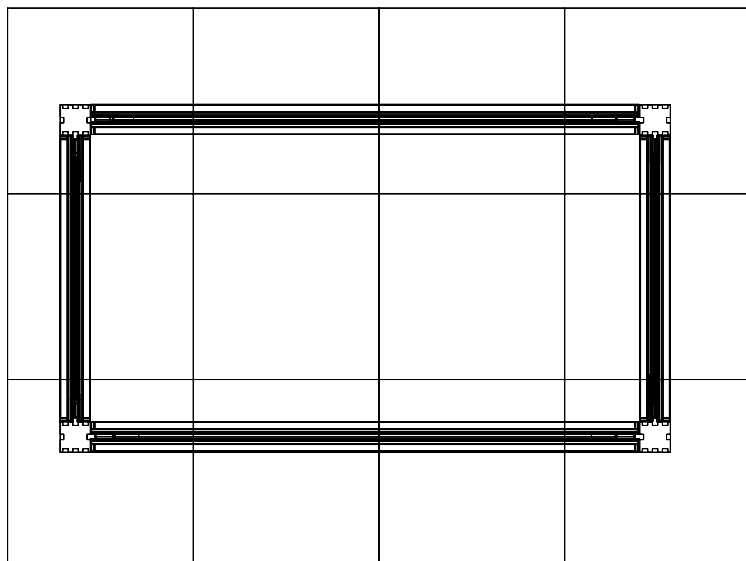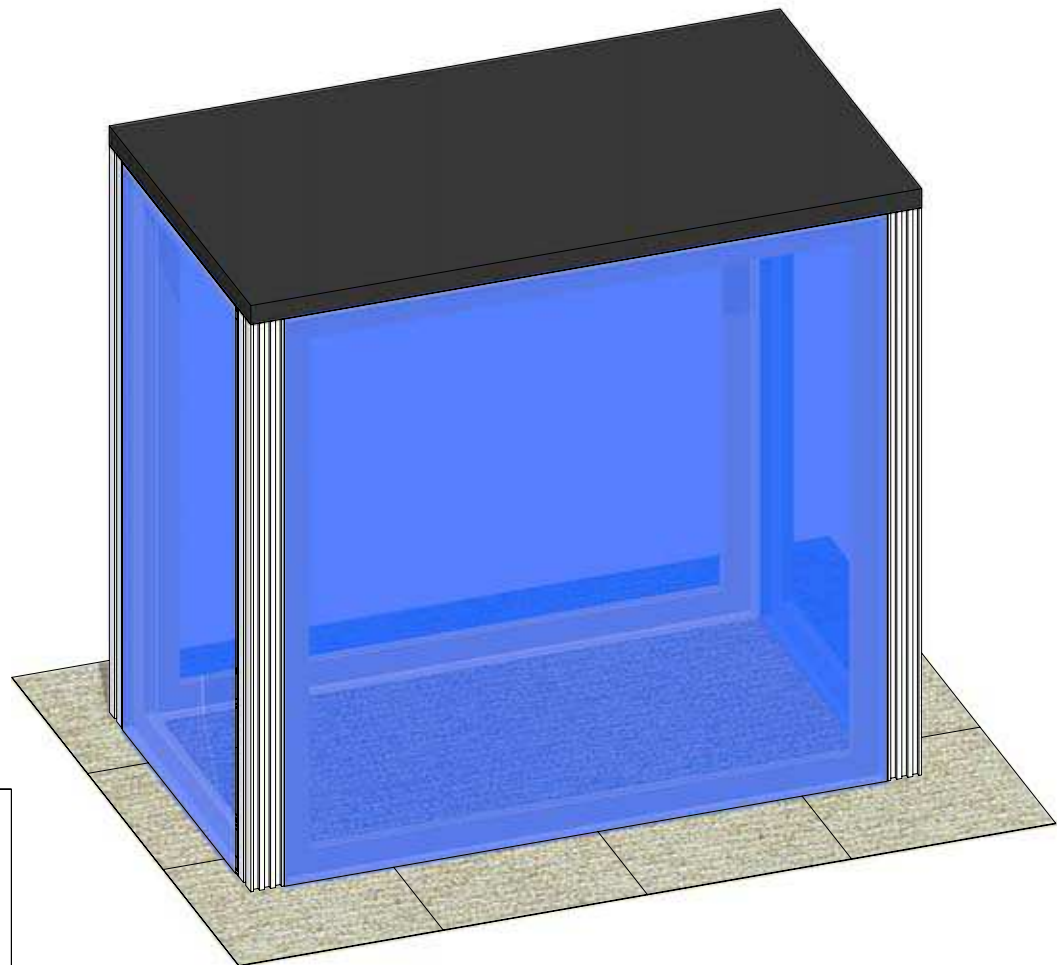
Step 1. Assemble Counter Front & Back

Connect F10s to F11s using corner locks as shown in the detail below. Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frames aside.

CORNER LOCK

CORNER LOCK

CORNER LOCK

F10

F11

F11

CORNER LOCK

F10

CORNER LOCK

vertical extrusion

horizontal extrusion

t-handle

Slide CORNER LOCK together with extrusion. Then tighten the screws to lock the CORNER LOCKs together

GRAPHIC

pull tab
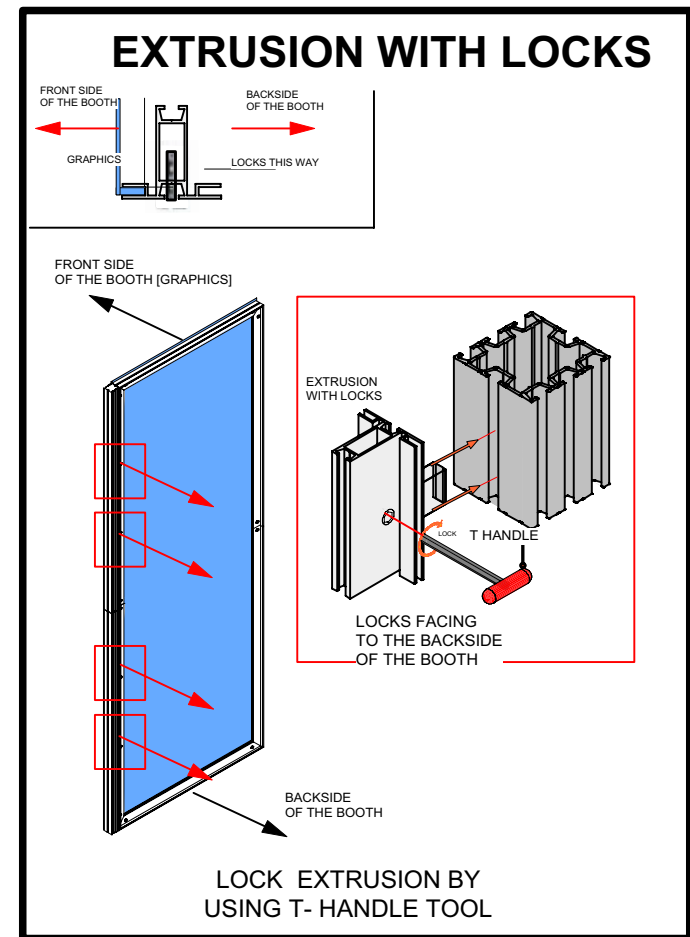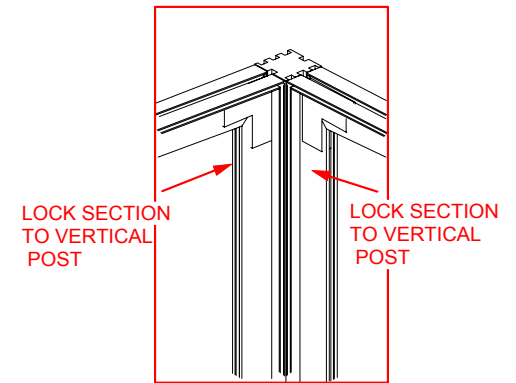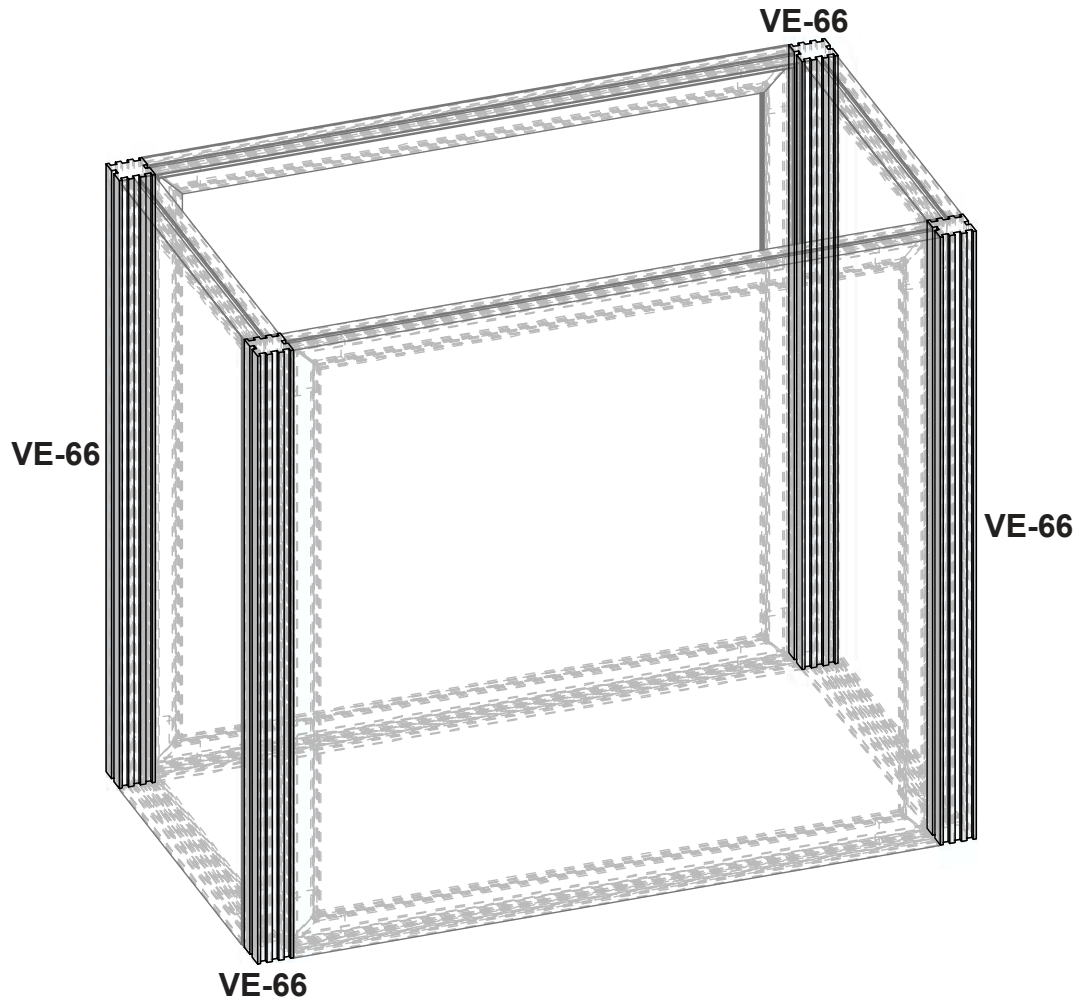
graphic

start point

pull tab

12.

Step 2. Build Counter Sides

Connect F17s to F11s using corner locks as shown in the detail below to build one rectangle. Push the rubber gasket in edge of graphic into the channel on the frame. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. Set frames aside.

CORNER LOCK

CORNER LOCK

F17

F11

F11

F17

CORNER LOCK

CORNER

CORNER LOCK

vertical extrusion

horizontal extrusion

t-handle

Slide CORNER LOCK together with extrusion. Then tighten the screws to lock the CORNER LOCKs together

GRAPHIC

pull tab

graphic

start point

pull tab

13.

Step 3.
Attach the VE-66s to the completed counter sections where shown using the detail below.

VE-66

VE-66

VE-66

VE-66

LOCK SECTION TO VERTICAL POST

LOCK SECTION TO VERTICAL POST

EXTRUSION WITH LOCKS

FRONT SIDE OF THE BOOTH

BACKSIDE OF THE BOOTH

GRAPHICS

LOCKS THIS WAY

FRONT SIDE OF THE BOOTH [GRAPHICS]

EXTRUSION WITH LOCKS

LOCK

T HANDLE

LOCKS FACING TO THE BACKSIDE OF THE BOOTH

BACKSIDE OF THE BOOTH

LOCK EXTRUSION BY USING T- HANDLE TOOL

Step 4.
Gently place the countertop onto the completed frame.

countertop
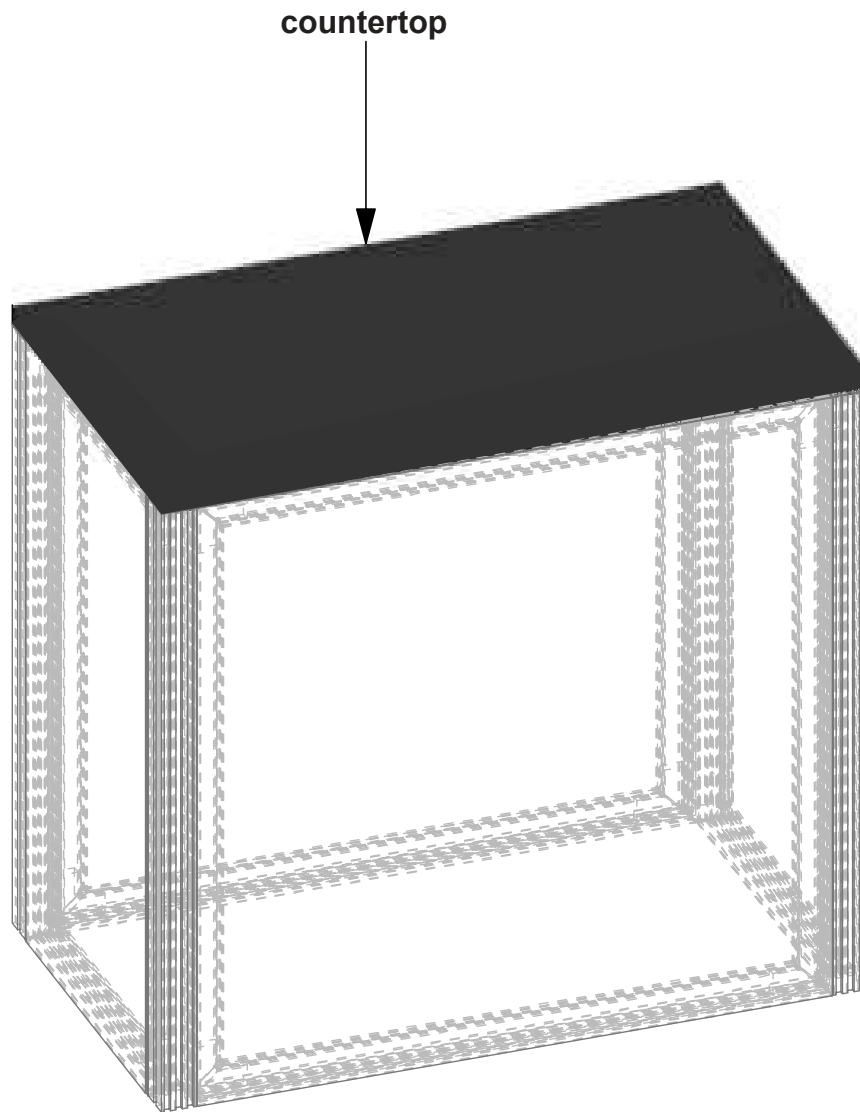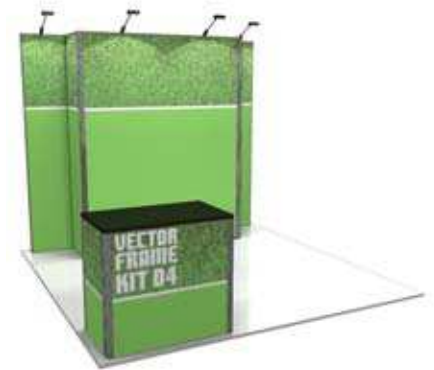
Check out these related products:
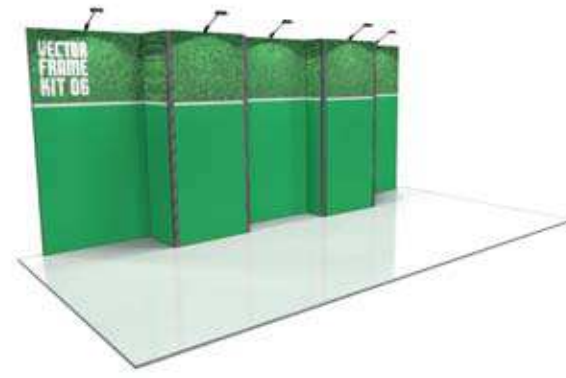
Vector Frame Kit 01

Vector Frame Kit 02

Vector Frame Kit 03

Vector Frame Kit 04

Vector Frame Kit 05

Vector Frame Kit 06

Vector Frame Kit 07

Vector Frame Kit 08