
Sabre Sail Sign-Spike Base

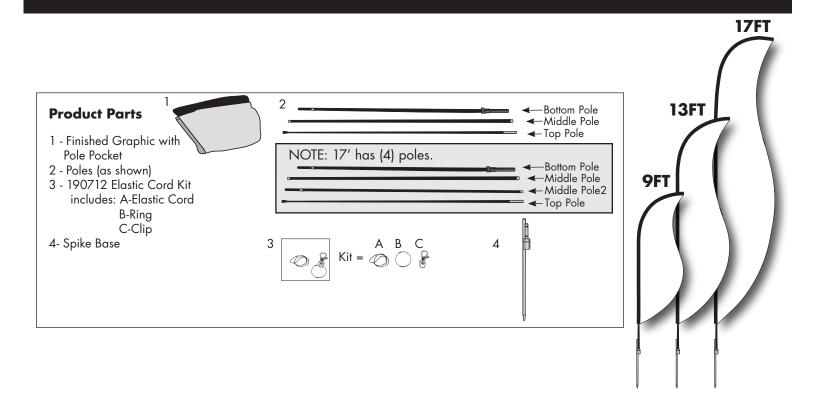

Display Set-Up

Step 1

Begin by removing the parts from the carry case and placing them on a clean flat surface.

Assemble the Poles (2) together by inserting the Bottom Pole into the Middle Pole.



Step 2

Insert the Top Pole into the Middle Pole. **NOTE:** for 17' Sabre Sail Signs you will have 2 Middle Poles to insert together before inserting the Top Pole.



Step 3


Carefully insert the top end of the assembled Poles (2) into the black pole pocket of the Fabric Graphic (1). Push the Pole (2) as far as it will go until it hits the end of the pole pocket. **DO**

NOT FORCEFULLY
PUSH THE POLE
OR IT COULD
SNAP.



Step 4


Remove the Ring (B) from the Clip (C) on the Elastic Cord Kit (3).
Connect the Ring (B) to the webbing loop on the bottom end of your Fabric Graphic Pole Pockets (1).



Display Set-Up Continued...

Step 5

Put one end of the Elastic Cord (A) through the Clip's (C) ring. Attach Clip (C) to the Ring (B)



Step 7


Push the Spike Base (4) into the ground where product is to be displayed. Insert Bottom of Pole (2) over stem on Spike Base (4.

Your display is now ready for view.



Step 6

Using the Elastic Cord (A) pull down the Fabric Graphic on the pole to create the desired shape. Knot the end of elastic Cord (A) and secure under the plastic Pole Hook located on the base of the Bottom Pole (2)



Storage

Place all product parts into Carry Case and store in a cool dry location, away from direct sunlight.



Care

To clean, wipe with damp cloth. Do not iron or dry clean the banner.